


Universal board covering UPO

Technical data:

Standard length of profile	1 m
Number of carriers per 1 m of profile	4 pcs
Distance between mounting rails	125 mm
Width of distance for built-in elements	46 + 0,5 mm

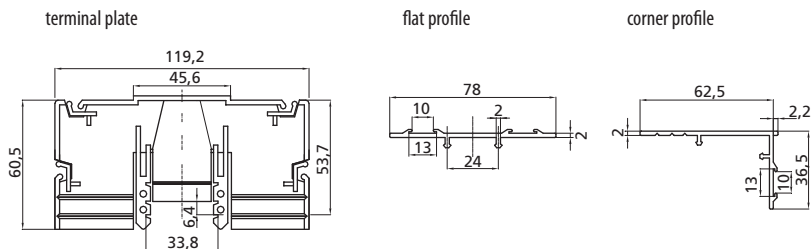

The covering UPO is the improved form for covering the space between rows of built-in elements in distribution boards. The built-in elements are installed on the mounting rails with width of 35 mm which shall be mounted in the distance of 125 mm.

Description - UPO covering consists of terminal plates that should be fixed on mounting rails, and flat and corner profiles, which are click-on mounted on the terminal plates. The space between rows of apparatuses is covered by a flat profile. Upper and lower rows of devices should be covered by corner profile.